

## DESCRIPTION

With a Bisondoor, openings with a width and height of up to 4.5 m can be closed in a safe and efficient way. This reinforced roll-up door gets its strength from the 60 mm horizontal steel tubes that slide into an aluminium U-profile on both sides. As a result, the gate can handle wind speeds of 100 km/h and withstand the wind pressure very well.


The Bison Door is extremely durable because all parts are made of galvanized steel, aluminium or RVS. In short, a very strong and maintenance-friendly gate!

## SPECIFICS

Maximum dimensions	Openings up to 4.5 m width and 4.5 m height
Wind resistance	Up to 100 km/h
Warranty	Yes
Protective cover	Option
Standard curtain	100% windbreak factor
Payable option	Other windbreak factors
Colors	Currently available colors per % on <a href="https://agri.vervaeke.be/en/samples">https://agri.vervaeke.be/en/samples</a>



## SPACE REQUIREMENTS

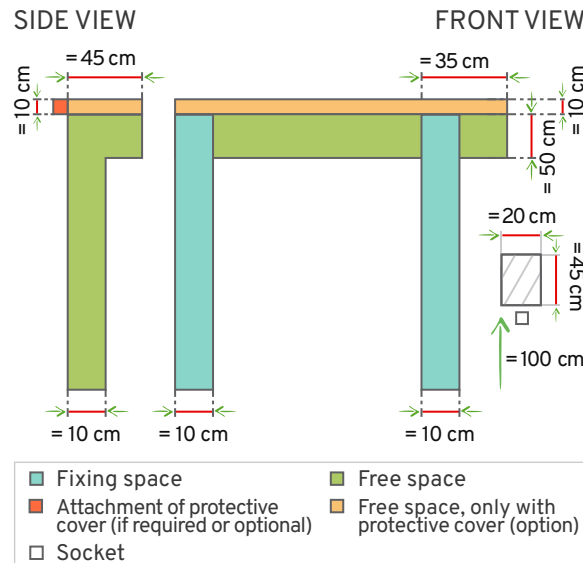

## DRIVE

**GFA - MOTOR 15 rpm SI-17 - 3 phase**  
 Socket: 400V + N + PE 16A +/- 5% at the control cabinet

## ADVANTAGES



High wind resistance



CE label



Durable




Low maintenance



Custom made

## APPLICATION

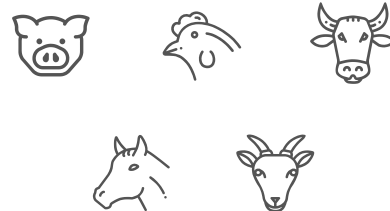

## EN STANDARDS

EN 13501-1 + A1 : 2009	Flammability	All our curtains have flammability standards. Most have B S2 D0.
		Contact us for the technical datasheet of your fabric.